


2 Flutes Diamond Coated Endmills For Graphite



2DEM

- Endmills for Graphite, reinforced plastic, carbon fiber, Non-ferrous and non-metallic materials.
- Excellent wear resistance by applying qualified CVD diamond coating.
- Wide range products prepared for various work shape and excellent performance.

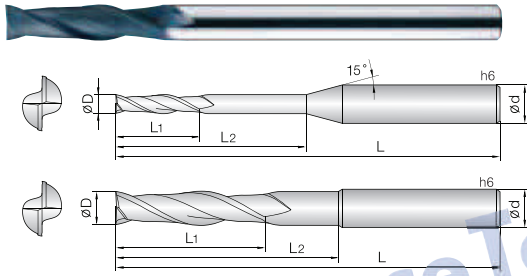

Unit(mm)

Model Number	Cutting Dia. D	Length Of Cut L1	Effective Length L2	Overall Length L	Shank dia d
2DEM 005 010 445	0.5	1	—	45	4
2DEM 005 030 445	0.5	1	3	45	4
2DEM 005 050 445	0.5	1	5	45	4
2DEM 006 012 445	0.6	1.2	—	45	4
2DEM 006 030 445	0.6	1.2	3	45	4
2DEM 006 050 445	0.6	1.2	5	45	4
2DEM 007 015 445	0.7	1.5	—	45	4
2DEM 007 040 445	0.7	1.5	4	45	4
2DEM 007 060 445	0.7	1.5	6	45	4
2DEM 007 080 445	0.7	1.5	8	45	4
2DEM 008 020 445	0.8	2	—	45	4
2DEM 009 025 445	0.9	2.5	—	45	4
2DEM 010 030 460	1	3	—	60	4
2DEM 010 030 445	1	3	—	45	4
2DEM 010 050 460	1	3	5	60	4
2DEM 010 100 460	1	3	10	60	4
2DEM 010 150 460	1	3	15	60	4
2DEM 010 200 460	1	3	20	60	4
2DEM 010 250 460	1	3	25	60	4
2DEM 010 300 460	1	3	30	60	4
2DEM 015 060 460	1.5	6	—	60	4
2DEM 015 100 460	1.5	6	10	60	4
2DEM 015 150 460	1.5	6	15	60	4
2DEM 015 200 460	1.5	6	20	60	4
2DEM 015 250 460	1.5	6	25	60	4
2DEM 015 300 460	1.5	6	30	60	4

2 Flutes Diamond Coated Endmills For Graphite



Unit(mm)

Model Number	Cutting Dia. D	Length Of Cut L1	Effective Length L2	Overall Length L	Shank dia d
2DEM 020 060 445	2	6	—	45	4
2DEM 020 080 480	2	8	—	80	4
2DEM 020 120 480	2	8	12	80	4
2DEM 020 150 480	2	8	15	80	4
2DEM 020 200 480	2	8	20	80	4
2DEM 020 250 480	2	8	25	80	4
2DEM 020 300 480	2	8	30	80	4
2DEM 020 400 480	2	8	40	80	4
2DEM 020 450 480	2	8	45	80	4
2DEM 020 500 480	2	8	50	80	4
2DEM 030 090 650	3	9	—	50	6
2DEM 030 120 480	3	12	—	80	4
2DEM 030 200 480	3	12	20	80	4
2DEM 030 250 480	3	12	25	80	4
2DEM 030 300 480	3	12	30	80	4
2DEM 030 400 480	3	12	40	80	4
2DEM 030 500 480	3	12	50	80	4
2DEM 040 120 650	4	12	—	50	6
2DEM 040 160 480	4	16	—	80	4
2DEM 050 150 660	5	15	—	60	6
2DEM 050 200 680	5	20	—	110	6
2DEM 060 180 660	6	18	—	60	6
2DEM 060 250 680	6	25	—	110	6
2DEM 060 250 6F0	6	25	—	150	6
2DEM 080 240 870	8	24	—	70	8
2DEM 080 400 8F0	8	25	40	150	8
2DEM 100 250 A80	10	25	—	80	10
2DEM 100 500 AG0	10	25	50	160	10
2DEM 120 250 C80	12	25	—	80	12
2DEM 120 600 CG0	12	25	60	180	12