


2 Flutes Taper Neck Ball Endmills For Graphite

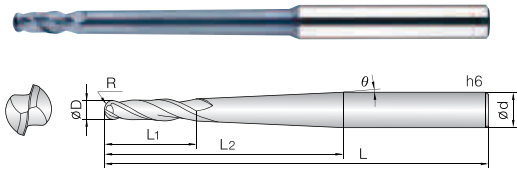

2GTB

- Ball Endmills for various work materials, graphite, hardened steels (HRC 48), pre-hardened steels, tool steels and cast irons.
- Excellent performance with low cutting force by DLC coating.
- Long flute length optimized for deep-side wall machining of graphite.
- Applied fine WC grade optimized for various non-ferrous and non-metallic work materials.

Unit(mm)

Model Number	Cutting Dia. D	Radius of BN R	Angle θ	Length Of Cut L1	Effective Length L2	Overall Length L	Shank dia d
2GTB 010 003 200 460	1	0.5R	0°30	4	20	60	4
2GTB 010 003 300 475	1	0.5R	0°30	4	30	75	4
2GTB 010 003 400 490	1	0.5R	0°30	4	40	90	4
2GTB 010 010 250 460	1	0.5R	1°	4	25	60	4
2GTB 010 010 350 475	1	0.5R	1°	4	35	75	4
2GTB 010 010 500 4A0	1	0.5R	1°	4	50	100	4
2GTB 015 003 300 475	1.5	0.75R	0°30	6	30	75	4
2GTB 015 003 400 480	1.5	0.75R	0°30	6	40	80	4
2GTB 015 003 500 4A0	1.5	0.75R	0°30	6	50	100	4
2GTB 015 010 300 475	1.5	0.75R	1°	6	30	75	4
2GTB 015 010 500 4A0	1.5	0.75R	1°	6	50	100	4
2GTB 015 010 600 600	1.5	0.75R	1°	6	60	100	4
2GTB 020 003 400 490	2	1R	0°30	8	40	90	4
2GTB 020 003 500 4A0	2	1R	0°30	8	50	100	4
2GTB 020 003 700 AD0	2	1R	0°30	8	70	130	4
2GTB 020 010 600 6B0	2	1R	1°	8	60	110	6
2GTB 020 010 900 6F0	2	1R	1°	8	90	150	6
2GTB 030 003 700 6C0	3	1.5R	0°30	10	70	120	6
2GTB 030 010 900 6F0	3	1.5R	1°	10	90	150	6
2GTB 040 003 700 6C0	4	2R	0°30	14	70	120	6
2GTB 040 010 800 6F0	4	2R	1°	14	80	150	6
2GTB 050 003 800 6D0	5	2.5R	0°30	16	80	130	6
2GTB 060 003 1000 8F0	6	3R	0°30	16	100	150	8
2GTB 060 010 1000 AF0	6	3R	1°	16	100	150	10
2GTB 080 010 1000 CF0	8	4R	1°	20	100	150	12
2GTB 100 010 830 CK0	10	5R	1°	25	83	200	12
2GTB 120 010 1100 GK0	12	6R	1°	30	110	200	16