


4 Flutes Diamond Coated Ball Endmills For Graphite



4DBE

- Ball Endmills for Graphite, reinforced plastic, carbon fiber, Non-ferrous and non-metallic materials.
- Excellent wear resistance by applying qualified CVD diamond coating.
- Wide range products prepared for various work shape and excellent performance.

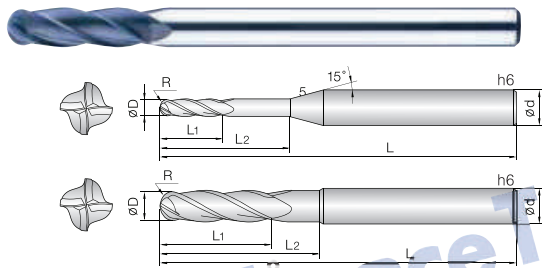

Unit(mm)

Model Number	Cutting Dia. D	Radius of BN R	Length Of Cut L1	Effective Length L2	Overall Length L	Shank dia d
4DBE 010 030 460	1	0.5R	3	—	60	4
4DBE 010 050 460	1	0.5R	3	5	60	4
4DBE 010 100 460	1	0.5R	3	10	60	4
4DBE 010 150 460	1	0.5R	3	15	60	4
4DBE 010 200 460	1	0.5R	3	20	60	4
4DBE 010 250 460	1	0.5R	3	25	60	4
4DBE 010 300 480	1	0.5R	3	30	80	4
4DBE 010 350 480	1	0.5R	3	35	80	4
4DBE 010 400 480	1	0.5R	3	40	80	4
4DBE 010 450 480	1	0.5R	3	45	80	4
4DBE 010 500 480	1	0.5R	3	50	80	4
4DBE 015 045 460	1.5	0.75R	5	—	60	4
4DBE 015 100 460	1.5	0.75R	5	10	60	4
4DBE 015 150 460	1.5	0.75R	5	15	60	4
4DBE 015 200 460	1.5	0.75R	5	20	60	4
4DBE 015 250 460	1.5	0.75R	5	25	60	4
4DBE 015 300 480	1.5	0.75R	5	30	80	4
4DBE 015 350 480	1.5	0.75R	5	35	80	4
4DBE 015 400 480	1.5	0.75R	5	40	80	4
4DBE 015 450 480	1.5	0.75R	5	45	80	4
4DBE 015 500 480	1.5	0.75R	5	50	80	4
4DBE 020 060 460	2	1R	6	—	60	4
4DBE 020 100 480	2	1R	6	10	80	4
4DBE 020 200 480	2	1R	6	20	80	4
4DBE 020 300 480	2	1R	6	30	80	4
4DBE 020 400 480	2	1R	6	40	80	4

4 Flutes Diamond Coated Ball Endmills For Graphite



Unit(mm)

Model Number	Cutting Dia. D	Radius of BN R	Length Of Cut L1	Effective Length L2	Overall Length L	Shank dia d
4DBE 020 500 4A0	2	1R	6	50	100	4
4DBE 020 600 4A0	2	1R	6	60	100	4
4DBE 020 700 4A0	2	1R	6	70	100	4
4DBE 030 080 460	3	1.5R	8	—	60	4
4DBE 030 150 4A0	3	1.5R	8	15	100	4
4DBE 030 200 4A0	3	1.5R	8	20	100	4
4DBE 030 300 4A0	3	1.5R	8	30	100	4
4DBE 030 400 4A0	3	1.5R	8	40	100	4
4DBE 030 500 4A0	3	1.5R	8	50	100	4
4DBE 030 600 4A0	3	1.5R	8	60	100	4
4DBE 030 700 4A0	3	1.5R	8	70	100	4
4DBE 040 160 460	4	2R	16	—	60	4
4DBE 040 160 080	4	2R	16	—	80	4
4DBE 040 160 4A0	4	2R	16	—	100	4
4DBE 040 160 4D0	4	2R	16	—	130	4
4DBE 060 250 680	6	3R	16	25	80	6
4DBE 060 250 6A0	6	3R	16	25	110	6
4DBE 060 300 6F0	6	3R	16	30	150	6
4DBE 080 300 880	8	4R	20	30	80	8
4DBE 080 300 8B0	8	4R	20	30	110	8
4DBE 080 350 8F0	8	4R	20	35	150	8
4DBE 080 400 8K0	8	4R	20	40	200	8
4DBE 100 350 A80	10	5R	22	35	80	10
4DBE 100 350 AB0	10	5R	22	35	110	10
4DBE 100 400 AG0	10	5R	22	40	160	10
4DBE 100 500 AK0	10	5R	22	50	200	10
4DBE 120 500 CB0	12	6R	25	50	110	12
4DBE 120 500 CG0	12	6R	25	50	160	12
4DBE 120 600 CK0	12	6R	25	60	200	12