


3 Flutes Diamond Coated Taper Neck Ball Endmills For Graphite



3DTB

- Ball Endmills for Graphite, reinforced plastic, carbon fiber, Non-ferrous and non-metallic materials.
- Excellent wear resistance by applying qualified CVD diamond coating.
- Wide range products prepared for various work shape and excellent performance.

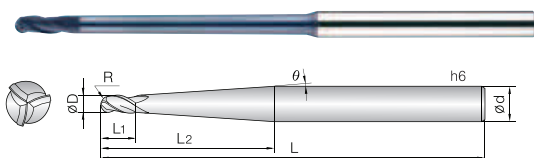

Unit(mm)

Model Number	Cutting Dia. D	Radius of BN R	Angle θ	Length Of Cut L1	Effective Length L2	Overall Length L	Shank dia d
3DTB 010 003 300 4A0	1	0.5R	0°30	3	30	100	4
3DTB 010 003 400 4A0	1	0.5R	0°30	3	40	100	4
3DTB 010 003 500 4A0	1	0.5R	0°30	3	50	100	4
3DTB 010 010 300 4A0	1	0.5R	1°	3	30	100	4
3DTB 010 010 400 4A0	1	0.5R	1°	3	40	100	4
3DTB 010 010 500 4A0	1	0.5R	1°	3	50	100	4
3DTB 010 010 600 4A0	1	0.5R	1°	3	60	100	4
3DTB 015 003 300 4A0	1.5	0.75R	0°30	4	30	100	4
3DTB 015 003 400 4A0	1.5	0.75R	0°30	4	40	100	4
3DTB 015 003 500 4A0	1.5	0.75R	0°30	4	50	100	4
3DTB 015 010 400 4A0	1.5	0.75R	1°	4	40	100	4
3DTB 015 010 500 4A0	1.5	0.75R	1°	4	50	100	4
3DTB 015 010 600 4A0	1.5	0.75R	1°	4	60	100	4
3DTB 020 003 400 4D0	2	1R	0°30	5	40	130	4
3DTB 020 003 500 4D0	2	1R	0°30	5	50	130	4
3DTB 020 003 600 4D0	2	1R	0°30	5	60	130	4
3DTB 020 010 500 4D0	2	1R	1°	5	50	130	4
3DTB 020 010 600 4D0	2	1R	1°	5	60	130	4
3DTB 020 010 700 4D0	2	1R	1°	5	70	130	4
3DTB 030 003 600 6F0	3	1.5R	0°30	6	60	150	6
3DTB 030 003 800 6F0	3	1.5R	0°30	6	80	150	6
3DTB 030 010 700 6F0	3	1.5R	1°	6	70	150	6
3DTB 030 010 900 6F0	3	1.5R	1°	6	90	150	6
3DTB 040 003 800 6F0	4	2R	0°30	8	80	150	6
3DTB 040 003 1000 6F0	4	2R	0°30	8	100	150	6
3DTB 040 010 650 6F0	4	2R	1°	8	65	150	6